


Installation Guide

Required Tools

- digital voltmeter
- small phillips screwdriver
- small flatblade screwdriver


Mounting

- REE-4106 and REE-4123 may be mounted directly to a control box surface or in a 2" x 4" electrical handy box.
- Add a blank cover to conceal the module.

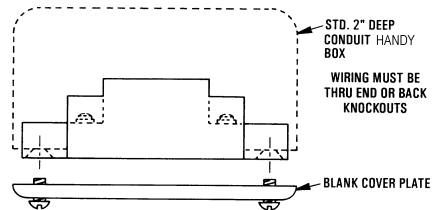

Wiring

- Wire as shown for proportional control of electric hot water valves.
- REE-4106 is designed to work with Normally Closed (N.C.) VEP series valves.
- REE-4123 is designed to work with Normally Open (N.O.) VEP Series valves.

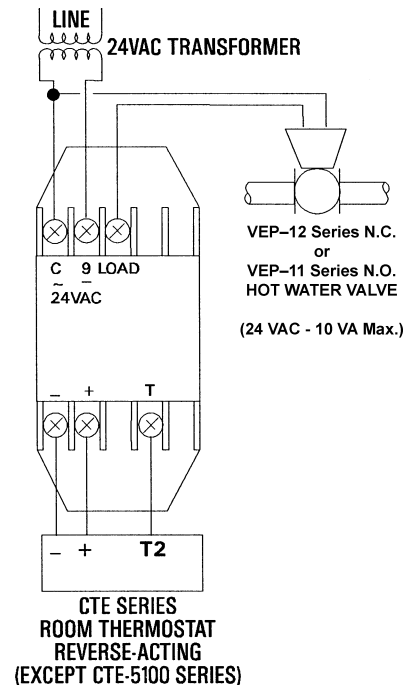

Maintenance

No routine maintenance is required, however protection from extremes of humidity and dirt is recommended.

Careful installation will also ensure long term reliability and performance.

KMC Controls
P.O. Box 497
19476 Industrial Drive
New Paris, IN 46553
U.S.A.
TEL: 574.831.5250
FAX: 574.831.5252
E-mail: info@kmcccontrols.com